


allIssuesUnder()

This function returns an **issue list** containing all descendant issues, i.e., all related issues located in any level below **current issue** according to **Advanced Roadmaps hierarchy**.

Advanced Roadmaps hierarchy includes:

- Issues linked by **Parent Link** custom field.
- Issues linked by **Epic-Story** link.
- **Sub-tasks** in the **lowest level** of the hierarchy. Sub-tasks under issues in intermediate levels of the hierarchy are not considered to belong to **Advanced Roadmaps hierarchy**.

Example:

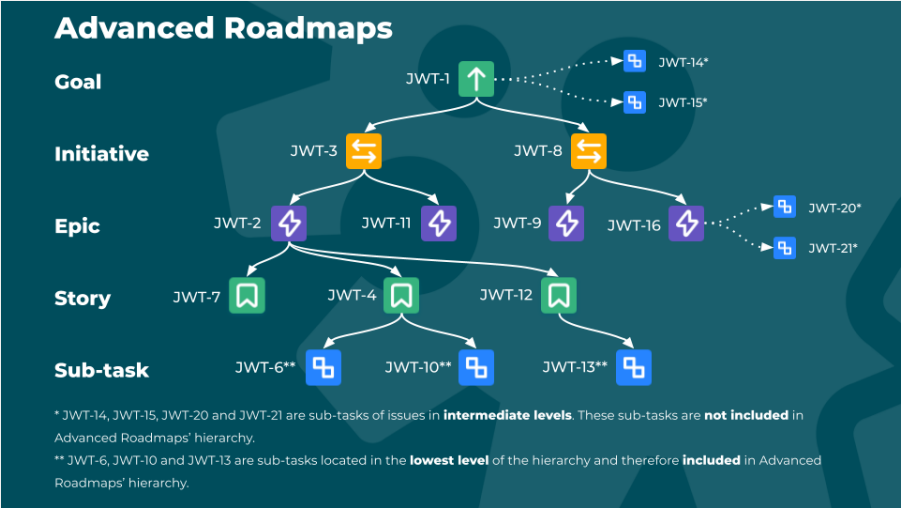

Syntax

allIssuesUnder() #Output: Issue list

Examples

Parser expression	Description
allIssuesUnder()	Considering that current issue is <i>JWT-3</i> , this expression returns all issues in any level below it: JWT-2, JWT-11, JWT-7, JWT-4, JWT-12, JWT-6, JWT-10, JWT-13

Output

This function returns an

ISSUE LIST

Variant where you additionally define **issues**.

Duplicated issues are filtered from the output.

Syntax

```
allIssuesUnder(issueList) #Output: Issue list
```

Examples

Parser expression	Description
<pre>allIssuesUnder (linkedIssues("is blocked by"))</pre>	Assuming that expression <code>linkedIssues("is blocked by")</code> returns <code>[JWT-4, JWT-8]</code>, this example returns all the children issues in any level below issues <code>JWT-3</code> and <code>JWT-4</code>: JWT-6, JWT-10, JWT-9, JWT-16 To achieve this the following functions are used: • linkedIssues()

Additional information

Parameters used in this function

Parameter	Input (data type)	Description
issueList	ISSUE LIST	Any given issue list. Usually this value is retrieved from a function (e.g. linkedIssues() or issuesUnderEpic()).

Output

This function returns an

Variant where you define **issue keys** instead.

Duplicated issues are filtered from the output.

Syntax

```
allIssuesUnder(issueKeys) #Output: Issue list
```

Examples

Parser expression	Description
<pre>allIssuesUnder("JWT-3, JWT-8")</pre>	This example returns all issues in any level below issues <code>JWT-3</code> and <code>JWT-8</code>: JWT-2, JWT-11, JWT-7, JWT-4, JWT-12, JWT-6, JWT-10, JWT-13,JWT-9, JWT-16

Additional information

Parameters used in this function

Parameter	Input (data type)	Description
issueKeys	TEXT	A comma separated list of issue keys.

Output

This function returns an

To return **the issues just under an issue** within the Advanced Roadmaps hierarchy, you might want to have a look into the [issuesUnder\(\)](#) function.

To return **all issues having the same parent** within the Advanced Roadmaps hierarchy, you might want to have a look into the [siblingIssues\(\)](#) function.

To return **the parent of an issue** within the Advanced Roadmaps hierarchy, you might want to have a look into the [parent\(\)](#) function.

To return **all issues above an issue** within the Advanced Roadmaps hierarchy, you might want to have a look into the [issuesAbove\(\)](#) function.



Use cases and examples

Use case

No content found.
