# Return all issues in the currently open sprint with unresolved sub-tasks

### On this page

Configuration | Screenshots | Related use cases

#### Use case

In the following use case we use a **JWT JQL function** in order to retrieve **all issues** in the current sprint that have **unresolved sub-tasks**.




## Configuration

Use the following JQL:

is sue Selection("Sprint in openSprints()", 'count(filterByResolution(subtasks(), "")) > 0")

# તિ

#### Screenshots

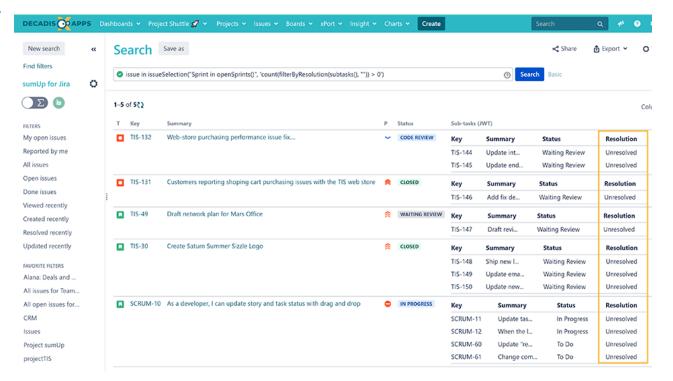



#### Related use cases

Use case JQL function

List all bugs where the current user was mentioned in a comment	issueSelection()
List all issues that are blocking issues that are due soon	linkedTo()
List all issues with an inactive assignee and that were assigned by the current user	issueSelection()
List all issues with a specific value matching a custom text field	issueSelection()
Retrieve all tickets assigned to a developer	usersWithRoleInProject()
Return all issues in the currently open sprint with unresolved sub-tasks	issueSelection()

If you still have questions, feel free to refer to our support team.