


# allIssuesUnder()

This function returns an **issue list** containing all descendant issues, i.e., all related issues located in any level below **current issue** according to **Advanced Roadmaps hierarchy**.

**Advanced Roadmaps hierarchy** includes:

- Issues linked by **Parent Link** custom field.
- Issues linked by **Epic-Story** link.
- **Sub-tasks** in the **lowest level** of the hierarchy. Sub-tasks under issues in intermediate levels of the hierarchy are not considered to belong to **Advanced Roadmaps hierarchy**.

**Example:**

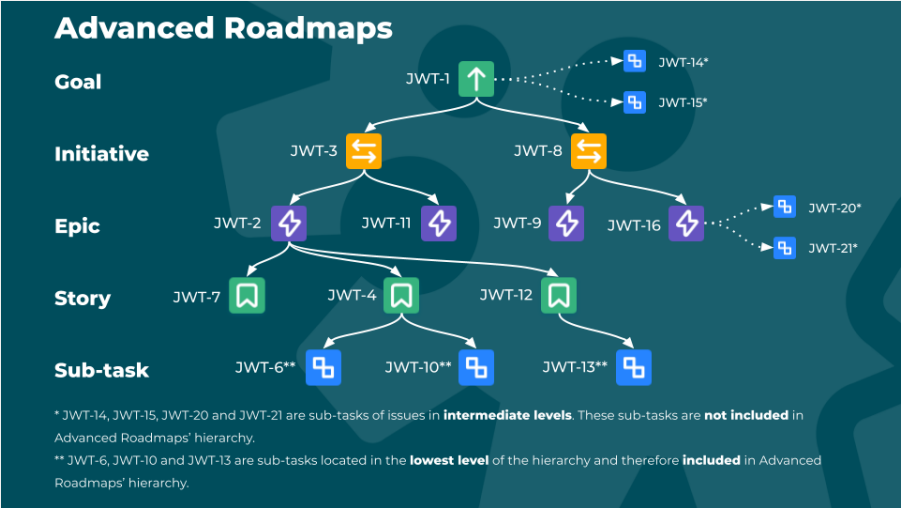

## Syntax

allIssuesUnder() #Output: Issue list

## Examples

Parser expression	Description
allIssuesUnder()	Considering that current issue is <i>JWT-3</i> , this expression returns all issues in any level below it:  <b>JWT-2, JWT-11, JWT-7, JWT-4, JWT-12, JWT-6, JWT-10, JWT-13</b>

## Output

This function returns an 

ISSUE LIST

Variant where you additionally define **issues**.

Duplicated issues are filtered from the output.

#### Syntax

```
allIssuesUnder(issueList) #Output: Issue list
```

## Examples

Parser expression	Description
<pre>allIssuesUnder (linkedIssues("is blocked by"))</pre>	<p>Assuming that expression <code>linkedIssues("is blocked by")</code> returns <code>[JWT-4, JWT-8]</code>, this example returns all the children issues in any level below issues <i>JWT-3</i> and <i>JWT-4</i>:</p> <p><b>JWT-6, JWT-10, JWT-9, JWT-16</b></p> <p>To achieve this the following functions are used:</p> <ul style="list-style-type: none"><li>• <a href="#">linkedIssues()</a></li></ul>

## Additional information

Parameters used in this function

Parameter	Input (data type)	Description
issueList	<input type="text" value="ISSUE LIST"/>	Any given issue list. Usually this value is retrieved from a function (e.g. <a href="#">linkedIssues()</a> or <a href="#">issuesUnderEpic()</a> ).

## Output

This function returns an

Variant where you define **issue keys** instead.

Duplicated issues are filtered from the output.

#### Syntax

```
allIssuesUnder(issueKeys) #Output: Issue list
```

## Examples

Parser expression	Description
<pre>allIssuesUnder("JWT-3, JWT-8")</pre>	<p>This example returns all issues in any level below issues <i>JWT-3</i> and <i>JWT-8</i>:</p> <p><b>JWT-2, JWT-11, JWT-7, JWT-4, JWT-12, JWT-6, JWT-10, JWT-13,JWT-9, JWT-16</b></p>

---

## Additional information

Parameters used in this function

Parameter	Input (data type)	Description
issueKeys	<input type="text" value="TEXT"/>	A comma separated list of issue keys.

---

## Output

This function returns an

To return **the issues just under an issue** within the Advanced Roadmaps hierarchy, you might want to have a look into the [issuesUnder\(\)](#) function.

To return **all issues having the same parent** within the Advanced Roadmaps hierarchy, you might want to have a look into the [siblingIssues\(\)](#) function.

To return **the parent of an issue** within the Advanced Roadmaps hierarchy, you might want to have a look into the [parent\(\)](#) function.

To return **all issues above an issue** within the Advanced Roadmaps hierarchy, you might want to have a look into the [issuesAbove\(\)](#) function.



## Use cases and examples

### Use case

---

No content found.

---