
Inherit value from parent in Advanced Roadmaps hierarchy

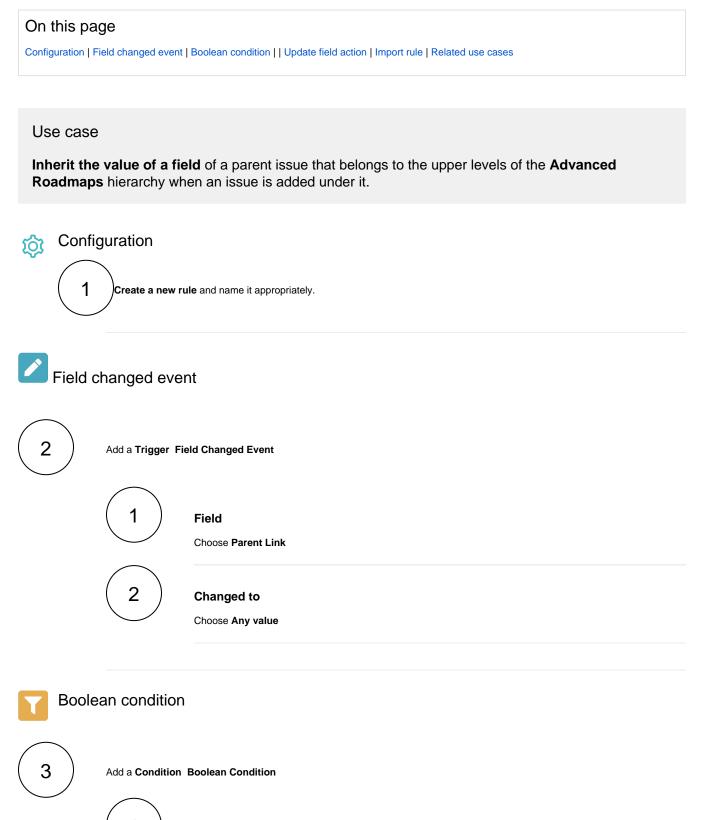


Expression

1

Introduce a boolean condition as the following one.

Although it is not essential, a boolean condition can be useful to restrict the scope of the automation rule.

Update field action

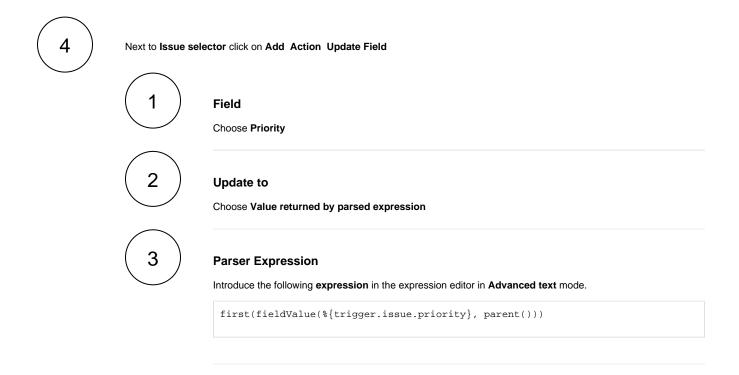



Import rule

Import the JSON file below to get started in no time.

JSON

After importing the JSON file, make sure to **check** the **configuration** of the rule. Non-existing configuration elements (issue types, fields, values etc.) will be highlighted.

```
{
    "name": "Inherit value from parent in Advanced Roadmaps hierarchy",
    "description": "Inherit the value of a field of a parent issue that belongs to the upper levels of the
Advanced Roadmaps hierarchy when an issue is added under it.",
    "creator": "admin",
    "status": false,
    "triggerData": "",
    "triggerType": "FIELD_CHANGED_EVENT",
    "configuration": {
        "refs": [
            "issue",
            "system",
            "trigger.issue",
            "trigger.parent"
        ],
        "fieldId": "10009",
        "option": "any",
        "triggerType": ""
    },
    "children": [
        {
            "sequence": 0,
            "type": "BOOLEAN_CONDITION",
            "ruleEntityType": "CONDITION",
            "configuration": {
                "refs": [
                    "issue",
                    "project",
                    "system",
                    "trigger",
                     "trigger.issue",
                    "trigger.parent"
                ],
                "expression": "%{trigger.issue.project.key} = \"KP\"",
                "expressionParsingMode": "logical",
                "actingUser": "field_00020"
            },
            "children": [
                {
                    "sequence": 0,
                    "type": "UPDATE_FIELD",
                    "ruleEntityType": "ACTION",
                    "configuration": {
                        "refs": [
                            "issue",
                            "project",
                            "system",
                            "trigger",
                             "trigger.issue",
                             "trigger.parent"
                        ],
                        "fieldId": "00017",
                        "mode": "parser",
                        "value": "first(fieldValue(%{trigger.issue.priority}, parent()))",
                        "valueParsingMode": "textAdvanced",
                         "sendMail": "true",
                         "actingUser": "field_00020"
                    },
                    "children": null,
                    "hasChildren": false
                }
            ],
            "hasChildren": true
        }
    ],
    "hasChildren": true
}
```



Related use cases

Use case	JWT feature	Workflow function	Parser functions	Label
Add components of the epic to the current issue	\$			
Bulk clear the issue resolution	\$			STAFF PICK
Bulk edit the issue resolution	\$			STAFF PICK
Copy excerpted value from new comments	\$		findPattern() first()	
Delete the attachments of an issue 30 days after closing it	\$			
Inherit value from parent in Advanced Roadmaps hierarchy	\$		fieldValue() first() parent()	
Keep the priority of parents and sub-tasks in sync	\$			
Sum up value in parent issue on field change in sub-tasks	\$		fieldValue() sum() subtasks()	
Update assignee and reporter to facilitate user deletion	\$			STAFF PICK

If you still have questions, feel free to refer to our support team.